


U470 / U472
WASTE RECEPTACLE
 FREE STANDING

JOB #:

ITEM #:

QTY:

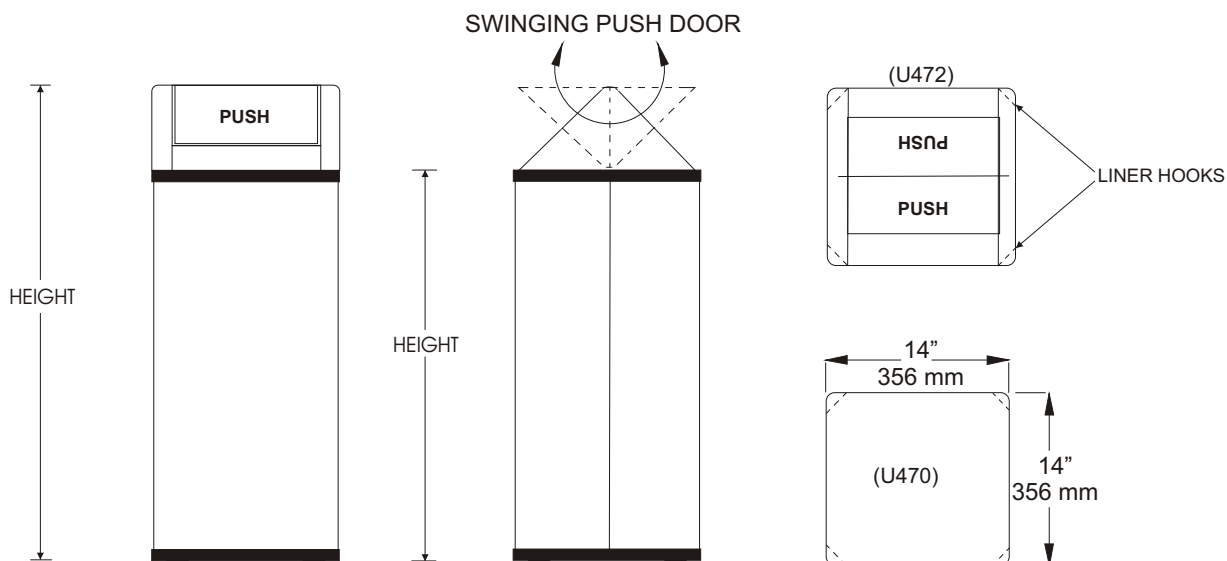

SPECIFICATIONS:

Body: Fabricated of type 304 #22 ga stainless steel with a #4 satin finish. Fully welded construction to form a one-piece body with radius corners to prevent injury. Each corner has an additional angled bracket to insure maximum rigidity.

Swing Top: (U472 series) Fabricated of type 304 #20 ga stainless steel with #4 satin finish. Fully welded construction and heavy duty internal mechanism allows flip top to pivot in both directions. All areas around opening have been hemmed and deburred to prevent injury.

Base: Fabricated of type 304 stainless steel welded to body with multiple welds.

Bumpers: Top and bottom wall vinyl bumpers protect wall surface from damage when receptacle is being moved around or serviced.

Feet: Rubber feet provide unit stability and prevent floor from being scratched.

UNIT	CAP.	TOP	OVERALL SIZE (WxHxD)
U470-13	13 gal	Open	14"x14"x21 3/4"
U470-25	25 gal	Open	14"x14"x30 1/2"
U470-36	36 gal	Open	18"x18"x30 1/2"
U472-13	13 gal	Swing	14"x14"x28 1/4"
U472-25	25 gal	Swing	14"x14"x37 1/2"
U472-36	36 gal	Swing	18"x18"x37 1/2"

U473: Swing top only for 13 & 25 gallon.

U474: Swing top only for 36 gallon.

Options: VL1: 13 gallon liner
 VL2: 25 gallon liner
 VL36: 36 gallon liner

INSTALLATION:

Waste receptacles can be placed in area that will not interfere or obstruct passage areas. Units can be easily serviced by removing swing top and emptying contents.

If open top type dispenser is ordered, separate swing top can be ordered to fit any capacity waste.

APPLICATION:

To provide a free standing, stainless steel, high capacity waste receptacle, that can be ordered with or without swing top.



Form: U470U472/2000