
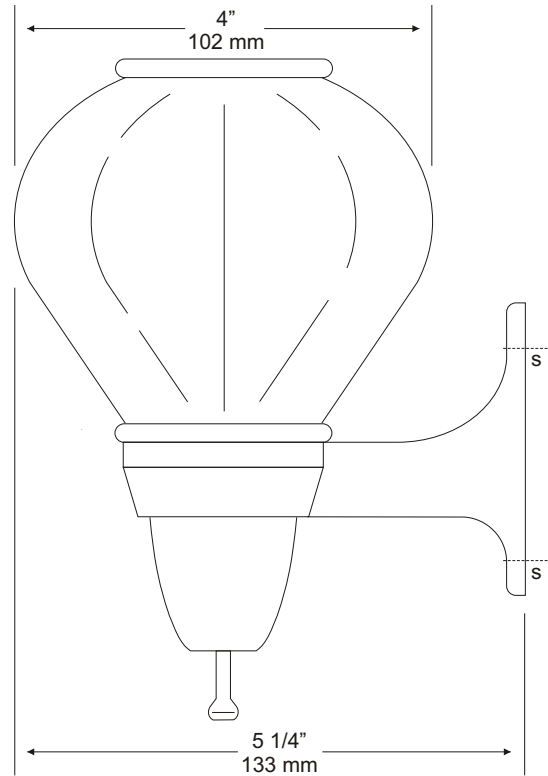


**U109  
 SOAP DISPENSER**

JOB #:

ITEM #:

QTY:

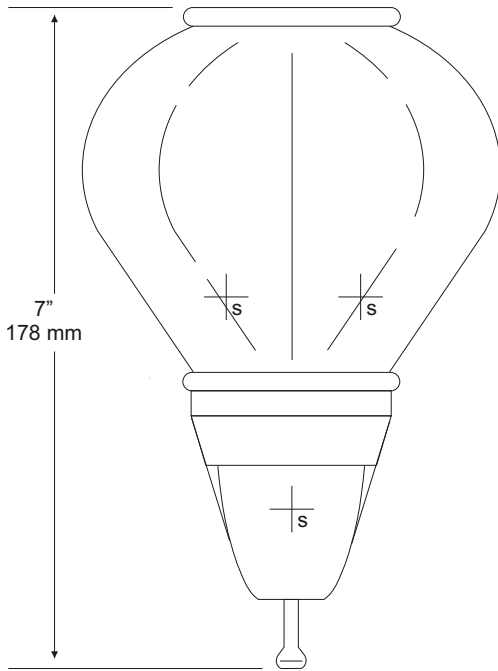

**SPECIFICATIONS:**

**Piston Valve Assembly:** Fabricated of bright chrome plated ABS material with a stainless steel return spring that operates on a gravity feed system.

**Operation:** One hand, push up operation that requires less than 5 lbs of force to operate. Will dispense a pre-measured amount of soap that is drip free.

**Globe:** Translucent, polyethylene that is shatterproof and corrosion resistant.

**Seals:** Globe and piston seals are fabricated of neoprene.

**Mounting Bracket:** Fabricated of bright chrome plated ABS with three (3) exposed mounting points.

**Overall Size:** 4"W x 7"H x 5 1/4"D  
 102mm x 178mm x 133mm

**Capacity:** 16 fl oz.

**INSTALLATION:**

Place mounting bracket on wall surface at desired location. Transfer mounting points to surface making sure unit will be level. Drill pilot holes and secure unit bracket with proper fasteners per each application. Fill globe with proper soap making sure soap has been mixed properly per instructions of soap manufacturer. Secure valve to globe snugly without over-tightning damaging seals. Place globe and valve down into bracket and screw into place. Test valve for operation.

*\*\*For best performance, use pre-mixed low concentrate solutions. Dispensers should have periodic maintenance performed to insure the life dispenser. Rinse out globe and valve with warm water to avoid sludge buildup.*

**APPLICATION:**

To provide a surface mounted one hand operation soap dispenser that comply's with ADA code when properly installed.

