



**U127
 SOAP DISPENSER**

JOB #:

ITEM #:

QTY:

MOUNTING HANDING TYPE SIZE OTHER

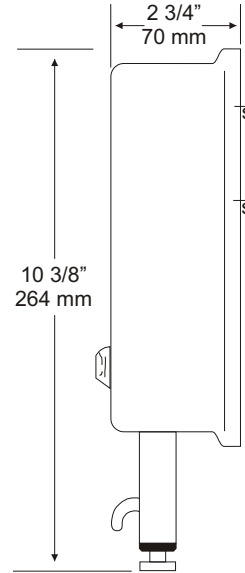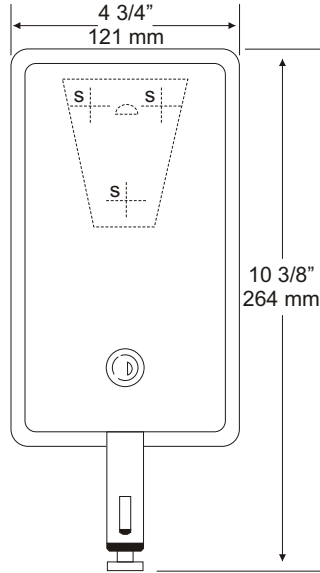

SPECIFICATIONS:

Soap Tank: Fabricated of type 304#20 gauge stainless steel with a #4 satin finish, fully welded one-piece construction.

Valve: All purpose chrome on brass, push up, one hand operational bellows valve. Valve operates with less than 5 lbs of force and when mounted properly will comply with ADA code.

Viewer: Clear plastic window allows a constant fluid level check.

Concealed Mounting Plate: Fabricated of heavy gauge stainless steel.

Filler Cap: Fabricated of stainless steel, hinged to allow easy servicing with special key that creates a vandal resistant dispenser.

Overall Size: 4 3/4"W x 10 3/8"H x 2 3/4"D
 121mm x 264mm x 70mm

Capacity: 40 oz.

INSTALLATION:

Provide an area on wall surface at desired or specified location. Place wall plate on wall surface making sure it is level. Transfer mounting points to wall and drill pilot holes. Secure plate with proper fasteners per application. Slide dispenser down over plate. Open service door and secure dispenser to plate with locking screw. Fill dispenser with proper soap and secure service door. Prime valve until soap flows freely.

***For best performance, use pre-mixed low concentrate solutions. Dispensers should have periodic maintenance performed to insure the life of the dispenser. Rinse out tank and valve with warm water to prevent sludge buildup.*

APPLICATION:

To provide a surface mounted stainless steel soap dispenser that comply's with ADA code.



Form: U127/2000