



US7138B

Exposed Mount Security Mirror


Revision 10/11

JOB #:

ITEM #:

QUANTITY:

MOUNTING	HANDING	TYPE	SIZE	OTHER

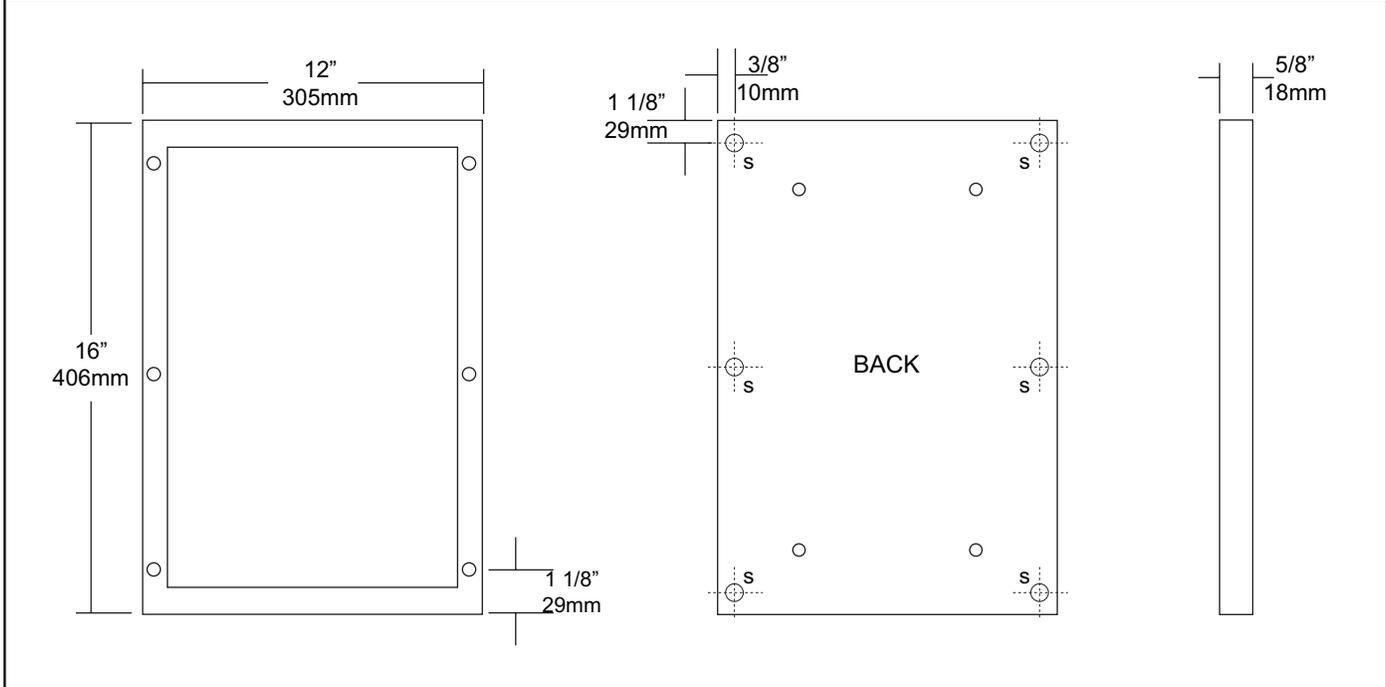

SPECIFICATIONS INSTALLATION

Frame: Fabricated of #14 gauge stainless steel with a #4 satin finish. (1 1/4" x 5/8") Welded construction with polished edges without miters. Frame is equipped with exposed mounting points.

Mirror: #8B bright polished stainless steel.

Back: Stainless back pan with weld nuts to receive 1/4"-20 threaded studs. (6) (Threaded studs are not provided by manufacturer.)

Standard size is 12"W x 16"H. Other sizes are available on request.

US712PM: Same as US7128B with "Plastic "Acrylic" in lieu of stainless steel.

Coordinate mirror installation with architect and contractor to avoid pipes, vents, wires, etc. in wall. Unit is anchored through wall or partition using six (6) on standard sizes. 1/4"-20 threaded rods, washers and nuts (Not supplied) to the threaded weld nuts on frame. Rod length must extend far enough through back of wall to secure nut and washer. Secure mirror with proper fasteners per application. Fasteners are not supplied by manufacturer.

*Note: The center weld nut on the flange will always be the center dimension of the height, standard or special size mirrors

NOTES

Formerly Model #: US7011P Series