


**U120 / U122  
 SOAP DISPENSER**

JOB #:

ITEM #:

QTY:

MOUNTING      HANDING      TYPE      SIZE      OTHER

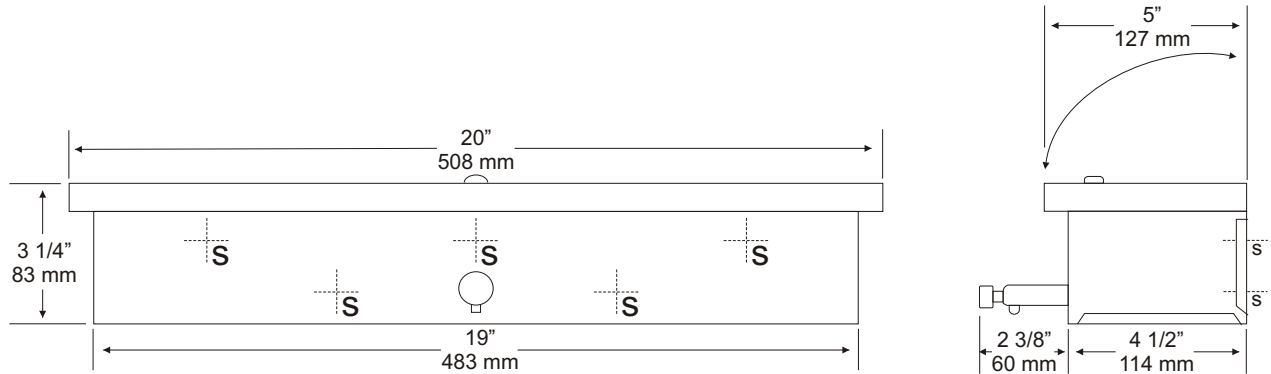

**SPECIFICATIONS:**

**Tank:** Fabricated of type 304 #20 gauge stainless steel with a #4 satin finish removable for easy servicing and cleaning.

**Shelf & Bracket:** Fabricated of type 304 #18 gauge stainless steel. All exposed areas have a #4 satin finish. Shelf is secured to back by means of full length, stainless steel piano type hinge.

**Valve:** U001U all purpose chrome on brass bellows type valve, secured to inside of tank with a chrome on brass lock nut.

**Lock:** Tamper resistant lock.

**U120:** Soap Dispenser

**Overall Size:** 20"W x 3 1/3"H x 5"D  
 508mm x 83mm x 127mm

**Capacity:** 128 fl oz.

**U122:** Same as U120 with two (2) valves in lieu of one (1).

**INSTALLATION:**

Provide an area on wall surface at desired or specified location. Remove tank and place unit on mounting surface making sure bracket is level, transfer mounting points. Drill pilot holes and secure bracket to wall with proper fasteners per application. Fill tank with proper soap and install into bracket. Prime valve until soap flows freely. Close lid (shelf) and secure.

*\*\* For best performance, use pre-mixed low concentrate solutions. Dispensers should have periodic maintenance performed to insure life of dispenser. Rinse out globe and valve with warm water to prevent sludge buildup.*

**APPLICATION:**

To provide a surface mounted stainless steel soap dispenser and shelf.

Form: U120/2000