


U5704 , U5714 SANITARY NAPKIN DISPOSALS

JOB #:

ITEM #:

QTY:

MOUNTING HANDING TYPE SIZE OTHER

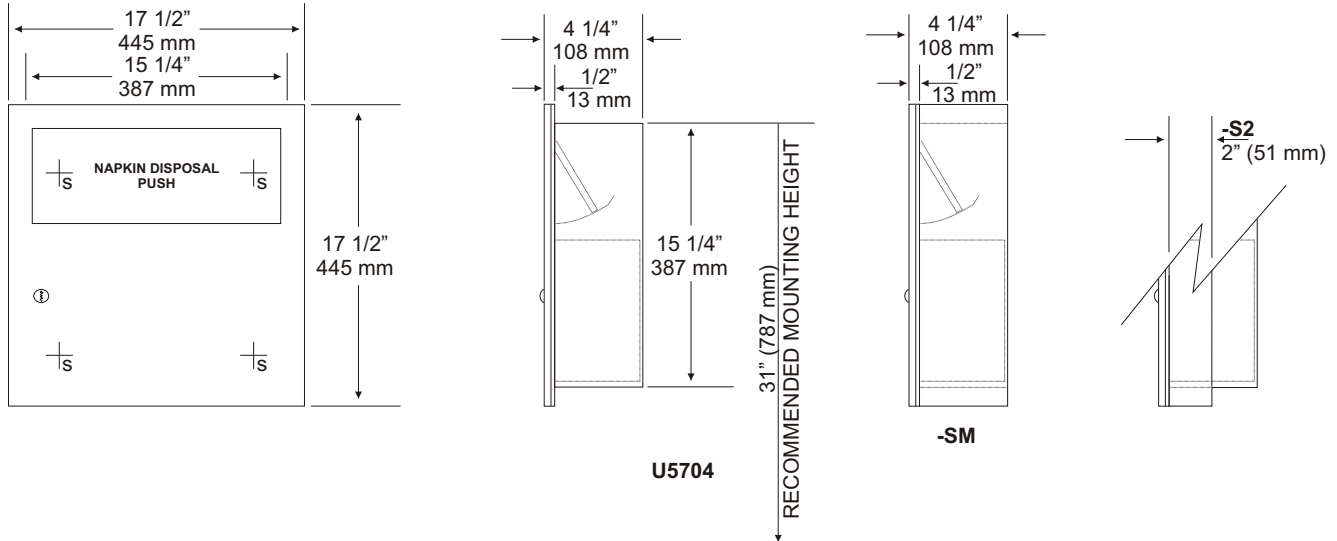

SPECIFICATIONS:

Uni-Door: Fabricated of type 304 #18 gauge stainless steel with a #4 satin finish and 1/2" returns to wall surface.
Body: Fabricated of type 304 #22 gauge stainless steel.
Push Door: Self closing door is fabricated of type 304 #22 gauge stainless steel with a #4 satin finish.
Waste: Fabricated of #22 gauge stainless steel with hemmed edges and wire handle for easy removal.
Flange: Fabricated of type 304 #22 gauge stainless steel with a #4 satin finish and 1/4" return to wall with no visible seams or miters.
Hinges: Full length, stainless steel piano type hinges.
Locks: Pin tumbler commercial quality locks keyed like all other A&J accessories.
Collars: Fabricated of type 304 #22 gauge stainless steel with #4 satin finish to match cabinet body.

U5704: Uni-Door Recessed Sanitary Napkin Disposal.

Overall Size: 17 1/2"W x 17 1/2"H x 4 1/4"D
438mm x 438mm x 108mm

Wall Opening: 15 3/4"W x 15 3/4"H x 4"D
400mm x 400mm x 102mm

Capacity: 2 gallons (.26 cu ft)

U5704-S2: 2" semi-rec collar w/ 2" (51mm) wall opening

U5704-SM: Surface Mounted

U5714: Uni-Door Surf Mtd Sanitary Napkin Disposal.

Overall Size: 11 1/2"W x 18"H x 6 1/2"D
292mm x 457mm x 165mm

Waste: 3.25 gallons (.44 cu ft)

INSTALLATION:

Recessed: Coordinate the wall opening with contractor/architect to avoid interference with pipes, vents, etc... Provide wall opening with desired unit. Remove waste and insert cabinet. If collar is required, slip collar over the back of cabinet before placing in opening. Drill pilot holes and secure cabinet with proper fasteners per application. Place waste can back into unit.
Surface: Place unit on wall surface and transfer mounting point location. Drill pilot holes and secure with proper fasteners per application.

APPLICATION:

To provide a stainless steel uni-door sanitary napkin disposal.

